


Vipera




Vipera 1230↓ × 500↔ ZX
colour: Soft 3020

Integrated thermostatic valve, angled, left, chrome
SLIM thermostatic head, chrome
Integrated pipe-masking set, chrome

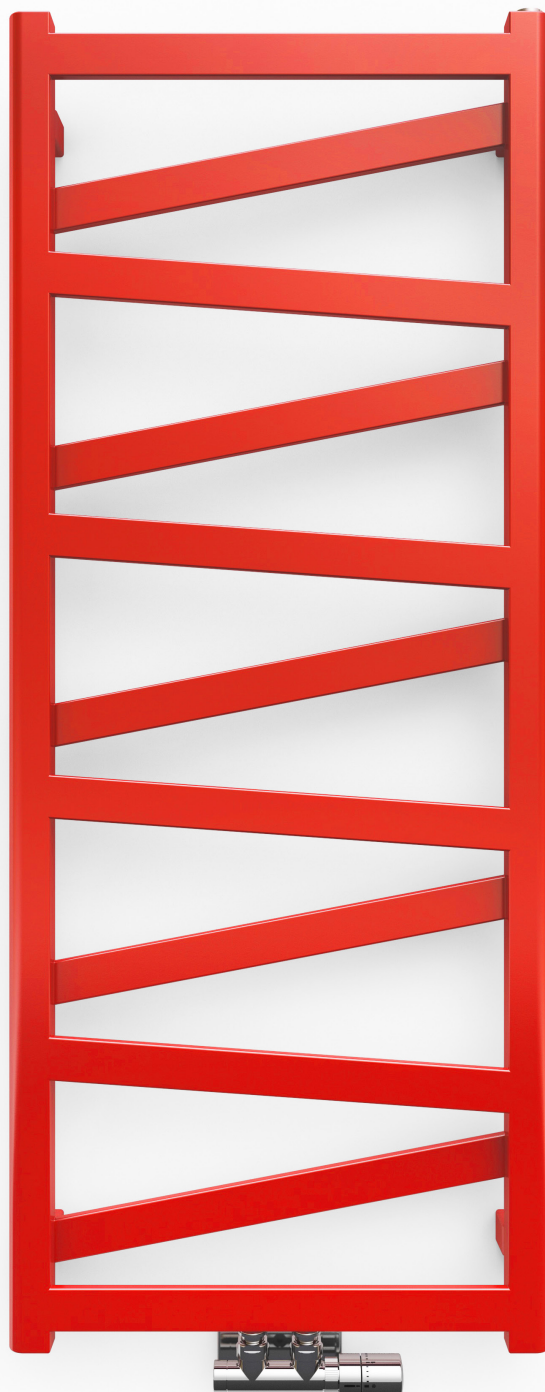





Standard connections:




Optional connections:




Electric radiators:



A ↓ 750÷1710:



Available sizes:

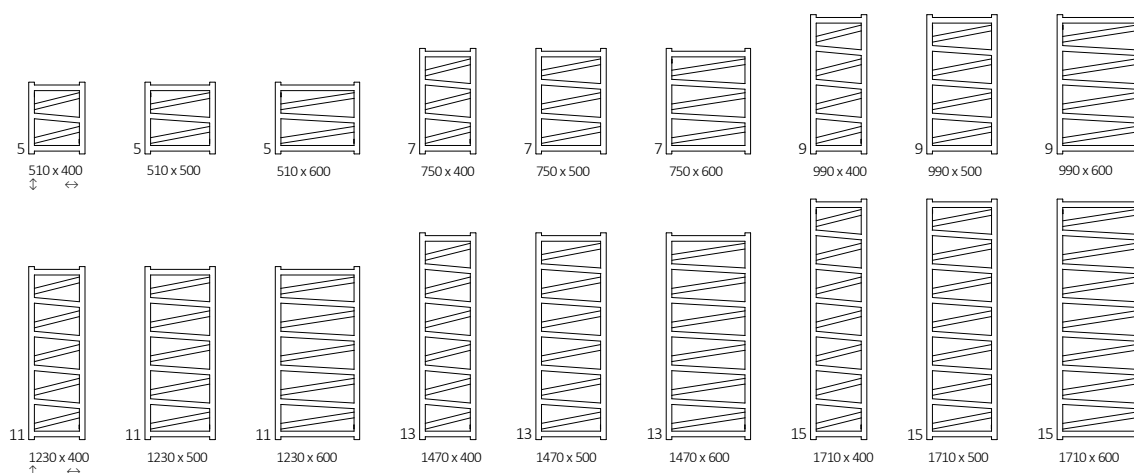

Specifications:

Working pressure: 800 kPa


Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	⊙ [W]	D [mm]	E [mm]	F [mm]	H [dm³]	⚖ [kg]	Product Code (configuration s. 5)
510	400	50	360	163	89	200	350	330	90	1,36	3,78	WGVPA051040
510	500	50	460	192	105	200	450	330	90	1,48	4,33	WGVPA051050
510	600	50	560	220	120	200	550	330	90	1,61	4,89	WGVPA051060
750	400	50	360	237	129	200	350	570	90	1,97	5,18	WGVPA075040
750	500	50	460	280	153	300	450	570	90	2,14	5,96	WGVPA075050
750	600	50	560	322	176	300	550	570	90	2,32	6,73	WGVPA075060
990	400	50	360	312	169	300	350	810	90	2,58	6,59	WGVPA099040
990	500	50	460	368	200	400	450	810	90	2,81	7,59	WGVPA099050
990	600	50	560	423	230	400	550	810	90	3,04	8,58	WGVPA099060
1230	400	50	360	382	207	400	350	1050	90	3,19	8,00	WGVPA123040
1230	500	50	460	451	244	400	450	1050	90	3,47	9,21	WGVPA123050
1230	600	50	560	519	281	600	550	1050	90	3,75	10,43	WGVPA123060
1470	400	50	360	457	246	400	350	1290	90	3,80	9,41	WGVPA147040
1470	500	50	460	540	291	600	450	1290	90	4,13	10,85	WGVPA147050
1470	600	50	560	622	335	600	550	1290	90	4,46	12,28	WGVPA147060
1710	400	50	360	531	285	600	350	1530	90	4,40	10,82	WGVPA171040
1710	500	50	460	627	337	600	450	1530	90	4,79	12,48	WGVPA171050
1710	600	50	560	722	388	800	550	1530	90	5,17	14,13	WGVPA171060





Technical drawing:


SX

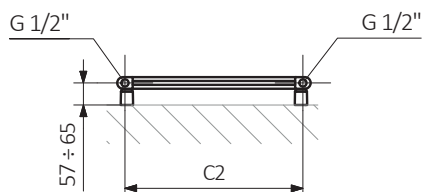



ZX

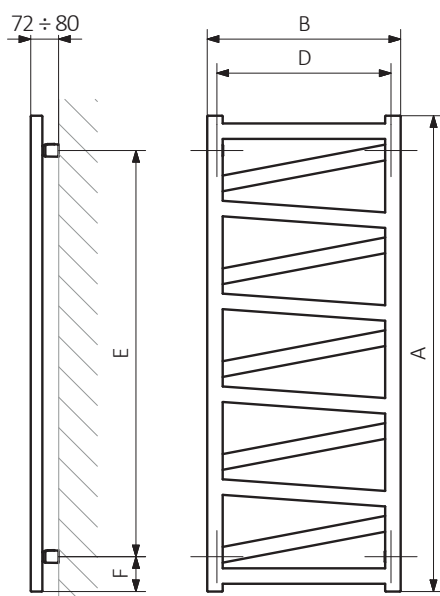

Z1

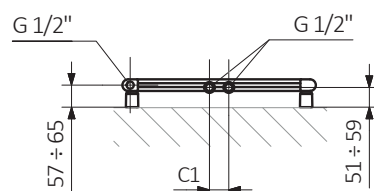



Z8

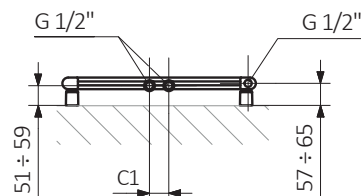

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:





Product codes can be found in product data sheet tables. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:


WGVPA051040

PRODUCT CODE
(located in the table for the product)

K916ZX

CONIGURATION CODE
(supplemented by hand)

Example Configuration

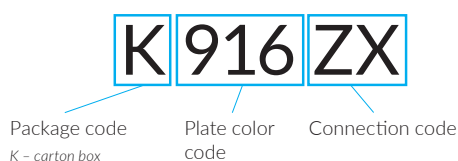

Structure of configuration code for electric radiators with a heating medium:


WLVPA051040

PRODUCT CODE
(located in the table for the product)

K916E1DRYW

CONIGURATION CODE
(supplemented by hand)

Example Configuration

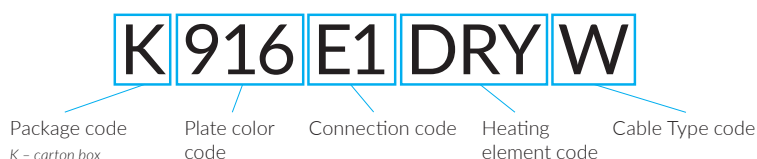

Epoxy primery

E - Code of epoxy primer is an extra processes.

WGVPA051040 K916ZX **E** — Extra processes or additions code



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



Colour
included
in the price

No additional payment for a color.